



192.168.1.1

90%



ZTE


F660

Please login to continue... [中文](#)

Username

Password

Login

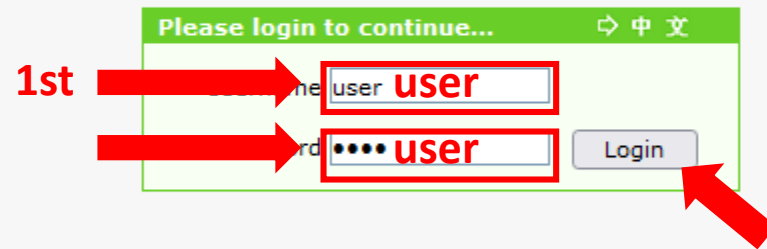

-Status

Device Information

+Network Interface

+User Interface

VoIP Status

+Network**+Application****+Administration****+Help**

Path: Status-Device Information

[中文](#)[Logout](#)

Model	F660
Serial Number	C0B101-ZTEEQG2LCV10918
Hardware Version	V7.0
Software Version	V7.0.10P2N27
Boot Loader Version	V7.0.10P2N27
PON Serial Number	ZTEGC8F5D218
Batch Number	07e4P2N27045e

+Status**-Network****-WLAN**

Basic

SSID Settings

Security

Access Control List

Associated Devices

WMM

WiFi Restrictions

WPS

+LAN

Port Locating

+Application**+Administration****+Help**

Path:Network-WLAN-SSID Settings

[中文](#)[Logout](#)Choose SSID Hide SSID Enable SSID Enable SSID Isolation Maximum Clients (1 ~ 32)SSID Name (1 ~ 32 characters)Priority

1st

2nd Change Wifi Name

3rd

Submit

Cancel

- +Status
- Network
 - WLAN
 - Basic
 - SSID Settings
 - Security
 - Access Control List
 - Associated Devices
 - WMM
 - WiFi Restrictions
 - WPS
 - +LAN
 - Port Locating
- +Application
- +Administration
- +Help

1st



Path: Network-WLAN-Security 中文 Logout

Choose SSID

Authentication Type

WPA Passphrase (8 ~ 63 characters)

WPA Encryption Algorithm

2nd Change Wifi Password



Submit Cancel

3rd

